
# ETCH PENNY EH-019



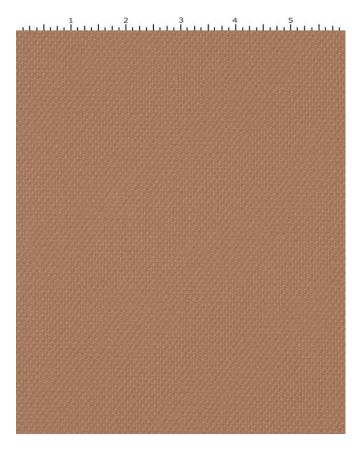

### **CLEANING**

CFC: Coated Fabrics Cleaning - When a spill/stain occurs wipe immediately with a clean dry cloth. Carefully remove the majority of the stain then follow the steps below.

Soap & Water - Remove ordinary dirt and smudges with a mild soap and water solution using a soft cloth or towel. Rinse with fresh water and wipe dry. Non-abrasive Cleaners - If residue remains, use a straight application of the following cleaners: Fantastik or 409 and gently clean with a soft cloth. Rinse with fresh water and wipe dry.

Isopropyl Alcohol - More stubborn stains may be eliminated using a cotton cloth soaked in 70-91% isopropyl (rubbing) alcohol. Wipe without spreading stain to surrounding area. A second application should be applied with vigorous rubbing in a circular motion. For highly textured material, a soft brush is recommended to clean valleys and crevices. Rinse with fresh water and wipe dry.

BC: Bleach Cleanable - 1 parts bleach, 9 parts water = 10% bleach, 90% water solution. Do not clean / disinfect fabric for longer than 10 minutes using the 10% bleach solution. Always rinse promptly with clean water after applying the bleach solution. Failure to do so will void any and all warranties.

Additional cleaning details at www.mayerfabrics.com

### **CATEGORY**

Upholstery

### **PROPERTIES**



### CONTENT

78% Vinyl - Phthalate Free face, 22% Polyester backing

# **BACKING**

Polyester

#### **FINISH**

Soil & Stain Resistant Top Coat with Ink Resistant Technology

### **WIDTH**

54"

#### **WEIGHT**

30 oz./linear yard

### **SHOWN RAILROADED**

No

# **DIRECTIONAL**

No

### **ROLL LENGTH**

30 yards

# **BREAKING STRENGTH**

Warp 101/Fill 93

# **SEAM SLIPPAGE**

Warp: 50/Fill: 50

## **ABRASION RESISTANCE**

Exceeds 100,000 Double Rubs (Wyzenbeek) Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

# **COLORFASTNESS TO CROCKING**

Dry: Class 4 min/Wet: Class 4 min

# **COLORFASTNESS TO LIGHT**

300 hours

## **APPLICATION**

Indoor

# **FLAMMABILITY**

Passes Cal 117-2013; NFPA 260/UFAC Class 1; FMVSS 302; May comply with Cal. Tech. Bul. 133 when combined with appropriate components.

# ETCH PENNY EH-019



WARRANTY

Standard Upholstery | '5' Five Year Warranty

**GREENGUARD**Certified

500 S. KITLEY AVE., INDIANAPOLIS, IN 46219 **TOLL FREE**: 800.428.4415 **T**: 317.267.2626 **F**: 317-267-2629